


SPECIFICATIONS

AO Medium	TeO2
Acoustic Mode	Slow Shear, (110 Axis)
Acoustic Velocity	0.617 mm/ μ s
Wavelength	488 nm
Input Polarization	Elliptical
Output Polarization	Elliptical
Insertion Loss	<3%
Center Frequency (Fc)	100 MHz
RF Bandwidth	50 MHz
RF Power	< 1.2 Watts
Active Aperture	4 mm 'H' X 14 mm 'L'
Average Diffraction Efficiency	>75%
Flatness Across Bandwidth	<10%
Min Diffraction Efficiency	>70%
Peak Valley at 633 nm	<0.125
RMS at 633 nm	N/A
VSWR	2.0 : 1
Scan Angle	N/A
Time Bandwidth	1100

OUTLINE DRAWING

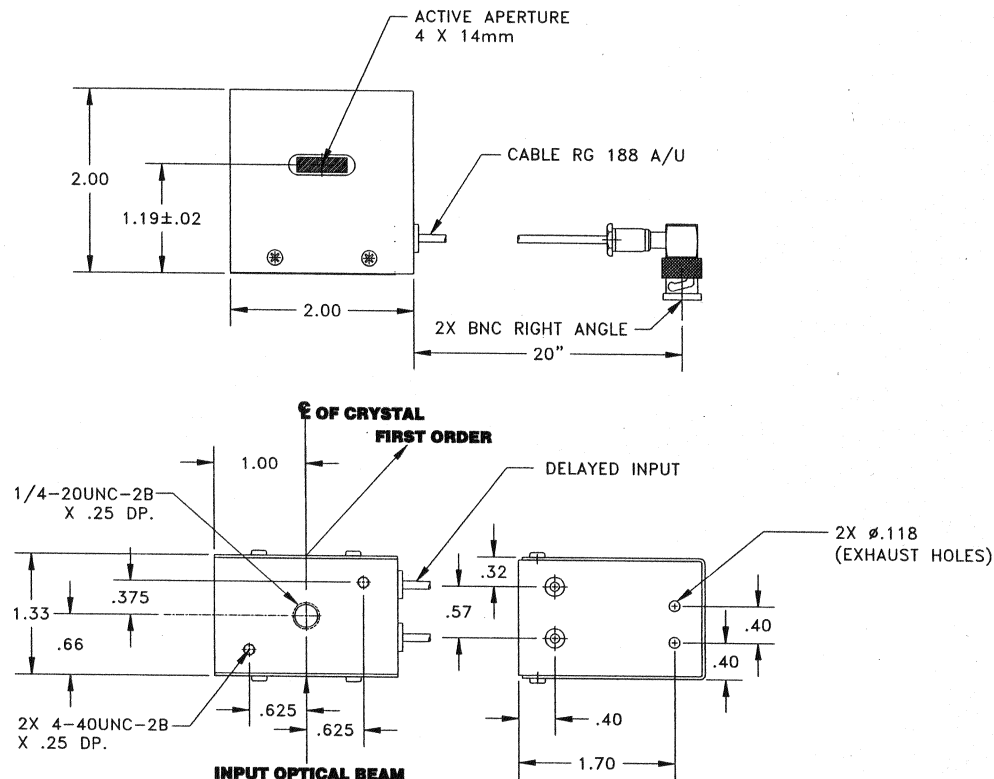

Notes:

1. Phased array input transducer.
2. Input impedance is 50 Ohms.
3. A delay box, p/n: 97-02010-01, is connected between the RF output of the driver and the two inputs of the deflector.

DOCUMENT

AUG 27 2002

CONTROL

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTERS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: .XX .XXX	DR	Gerl Scholz 8/22/2002	Crystal Technology, Inc. DESCRIPTION: AODF 4100-1
MATERIAL:	CHK		
FINISH:	APP	<i>Mg 08/26/02</i>	
	APP		
PART NUMBER:		97-01989-01	REV: A
			SHEET 1 OF 1